



NOAA Northeast Regional Climate Center:
Climate & Weather Information for
New England Water Utilities & Stormwater Managers Workshop



U.S. EPA National Stormwater Calculator (SWC)

Jason Bernagros

July 28, 2020

U.S. Environmental Protection Agency

Office of Research and Development

Center for Environmental Solutions and Emergency Response

Water Infrastructure Division, Stormwater Management Branch



The views expressed in this presentation are those of the author and do not necessarily reflect the views or policies of the U.S. Environmental Protection Agency. It has been subjected to review by the Office of Research & Development and approved for presentation. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

National Stormwater Calculator (SWC)

EPA National Stormwater Calculator

NEW | SAVE | OPEN | RESOURCES | CONTACT

Help prevent pollution by controlling stormwater runoff.

It's one of the greatest threats to clean water in America today.

Whether you're an urban planner, developer, landscape architect, or homeowner, this tool can help you balance land developments and landscaping with the right amount of green infrastructure.

Name Your Site (Optional)

Get Started

The SWC web app works best with the following browsers: Microsoft Edge, Google Chrome, Mozilla Firefox, and Apple Safari.

Please contact SWC@epa.gov with any questions, suggestions, or problems with this application.

Last updated on: December 15, 2018

The video player shows the SWC web application interface, which includes a map of the Boston area (Burke, Springfield, West Springfield, Weymouth, Boston, Milton) and a sidebar with various input fields for site characteristics.

<https://www.epa.gov/water-research/national-stormwater-calculator>

What is the SWC?


- **Stormwater Management (Green Infrastructure/Low Impact Development (LID)) Design and Planning Tool**
 - Allow for screening-level analysis of various green infrastructure (GI) practices, including planning level costs (green roofs, rain gardens, cisterns, etc.) throughout the U.S.
 - Model post-construction urban stormwater runoff discharges
 - Effects of alternative GI controls
 - Effects of changes in weather/climate
 - Allow non-technical professionals to conduct screening level stormwater runoff for small to medium sized (less than 1 - 12 acres) urban sites

Storm Water Management Model (SWMM)

- SWMM: A dynamic rainfall-runoff simulation model for long-term simulation of runoff quantity. Is an industry standard for urban stormwater modeling.
- SWMM produces stormwater runoff estimates in the background of the SWC

EPA United States Environmental Protection Agency

Environmental Topics Laws & Regulations About EPA Search EPA.gov

Related Topics: [Water Research](#) CONTACT US SHARE   

Storm Water Management Model (SWMM)

Helps predict runoff quantity and quality from drainage systems


EPA's Storm Water Management Model (SWMM) is used throughout the world for planning, analysis, and design related to stormwater runoff, combined and sanitary sewers, and other drainage systems. It can be used to evaluate gray infrastructure stormwater control strategies, such as pipes and storm drains, and is a useful tool for creating cost-effective green/gray hybrid stormwater control solutions. SWMM was developed to help support local, state, and national stormwater management objectives to reduce runoff through infiltration and retention, and help to reduce discharges that cause impairment of waterbodies.

Software, Compatibility, Manuals, and Other Documents


SWMM is a Windows-based desktop program. It is open source public software and is free for use worldwide. SWMM 5 was produced in a joint development effort with CDM, Inc., a global consulting, engineering, construction, and operations firm.

On this Page

- [Software, Compatibility, and Manuals](#)
- [Capabilities](#)
- [Applications](#)
- [Green Infrastructure as LID Controls](#)
- [Technical Support](#)
- [Resources](#)



SWC Web Application

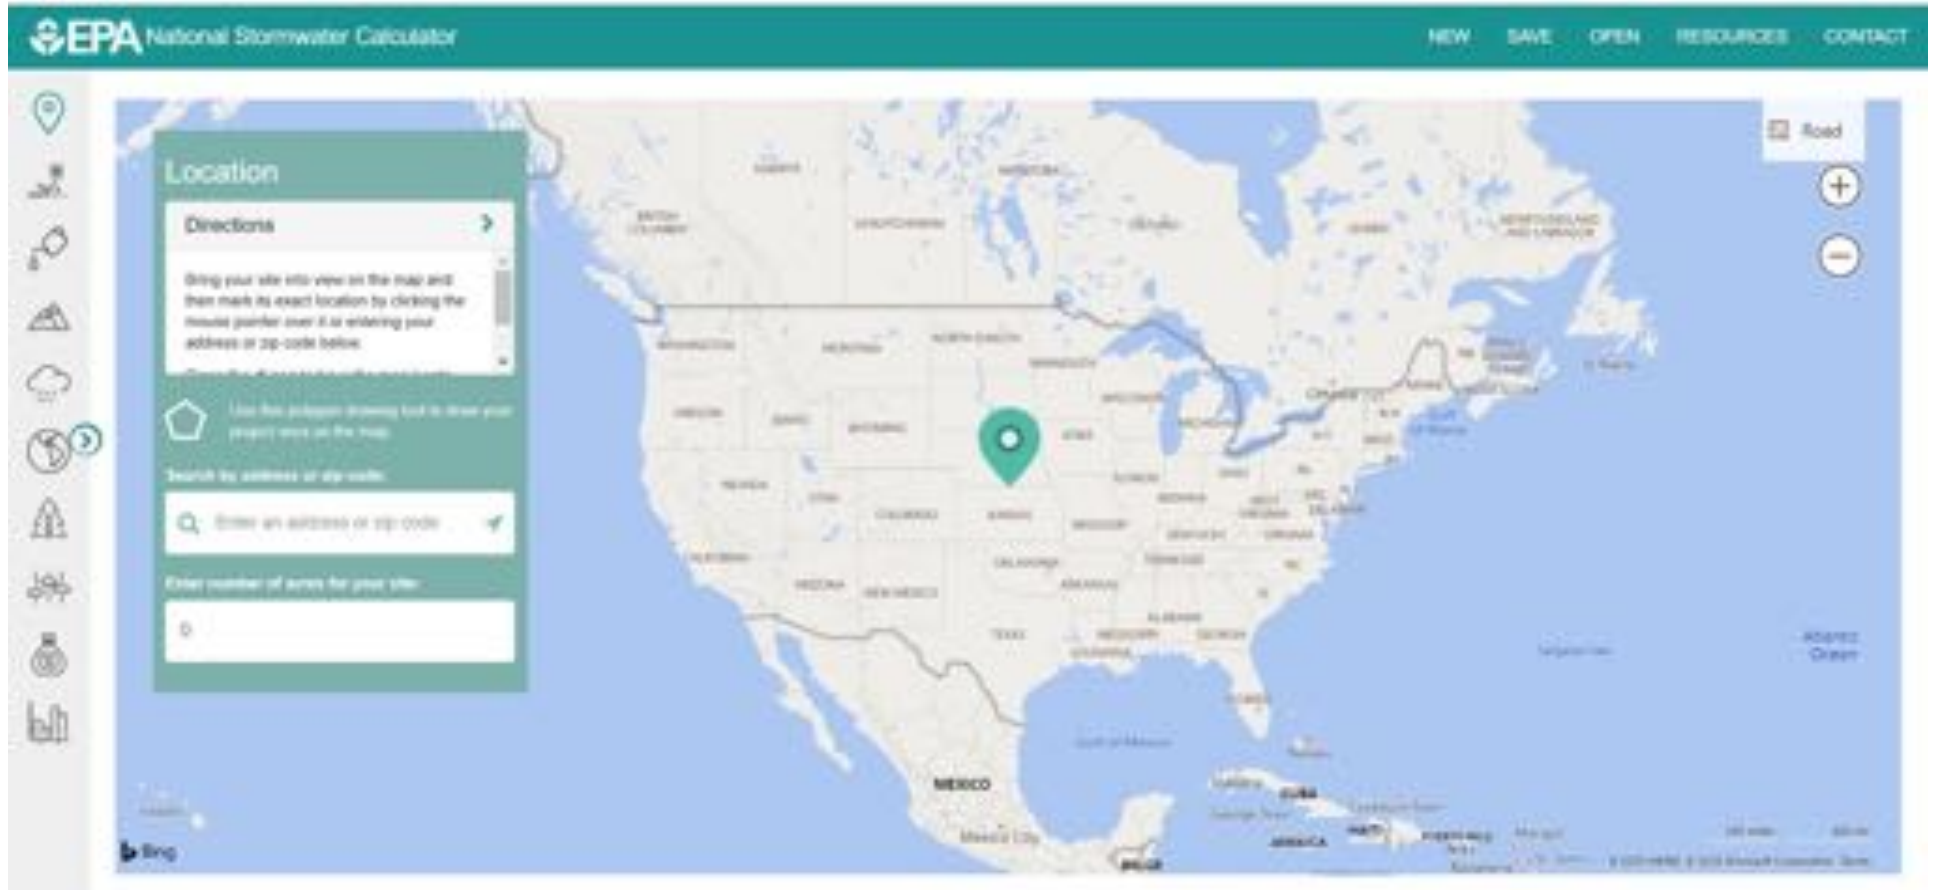

<https://swcweb.epa.gov/stormwatercalculator/>

SWC:

Site Parameters and Embedded Data-sets

- **Location:** Bing Maps
- **Soils:** NRCS SSURGO
- **Slope:** NRCS SSURGO
- **Hydraulic Conductivity:** NRCS SSURGO
- **Precipitation and Temperature:** National Climate Center (NCDC)-NOAA from EPA's BASINS Model
- **Potential Evapotranspiration:** Calculation based on meteorological data
- **Climate Change Future Scenarios:** Precipitation & potential evapotranspiration
- **Land-Cover/Use:** Menu driven by user
- **LID Practices & Costs:** Menu driven by user



SWC Application: Northeast Ohio Regional Sewer District (NEORS D) Green Infrastructure Grants Program Kamm's Corners Public Parking Lot Retrofit Project

- SWC used by grant applicants for quantifying stormwater runoff reductions of proposed projects

NEORS D Green Infrastructure Grants Program Storymap

NEORS D Awarded Green Infrastructure Grants Projects | NEORS D Appendix 3 Green Infrastructure | Other Green Infrastructure Projects


24 2018 Kamm's Corners Public Parking Lot Retrofit




Applicant: City of Cleveland
Location: 16906 Albers Avenue
Community: Cleveland - Kamm's Corner Neighborhood
GI Project Type: Green Infrastructure Grants Program
Grant Award: \$240,583
Subwatershed: Rocky River
Summary: Bioretention cells

<https://neorsd.maps.arcgis.com/apps/Shortlist/index.html?appid=efd0ff60d52f4860978c5bb4098cb3d9>

SWC Analysis: Project Location

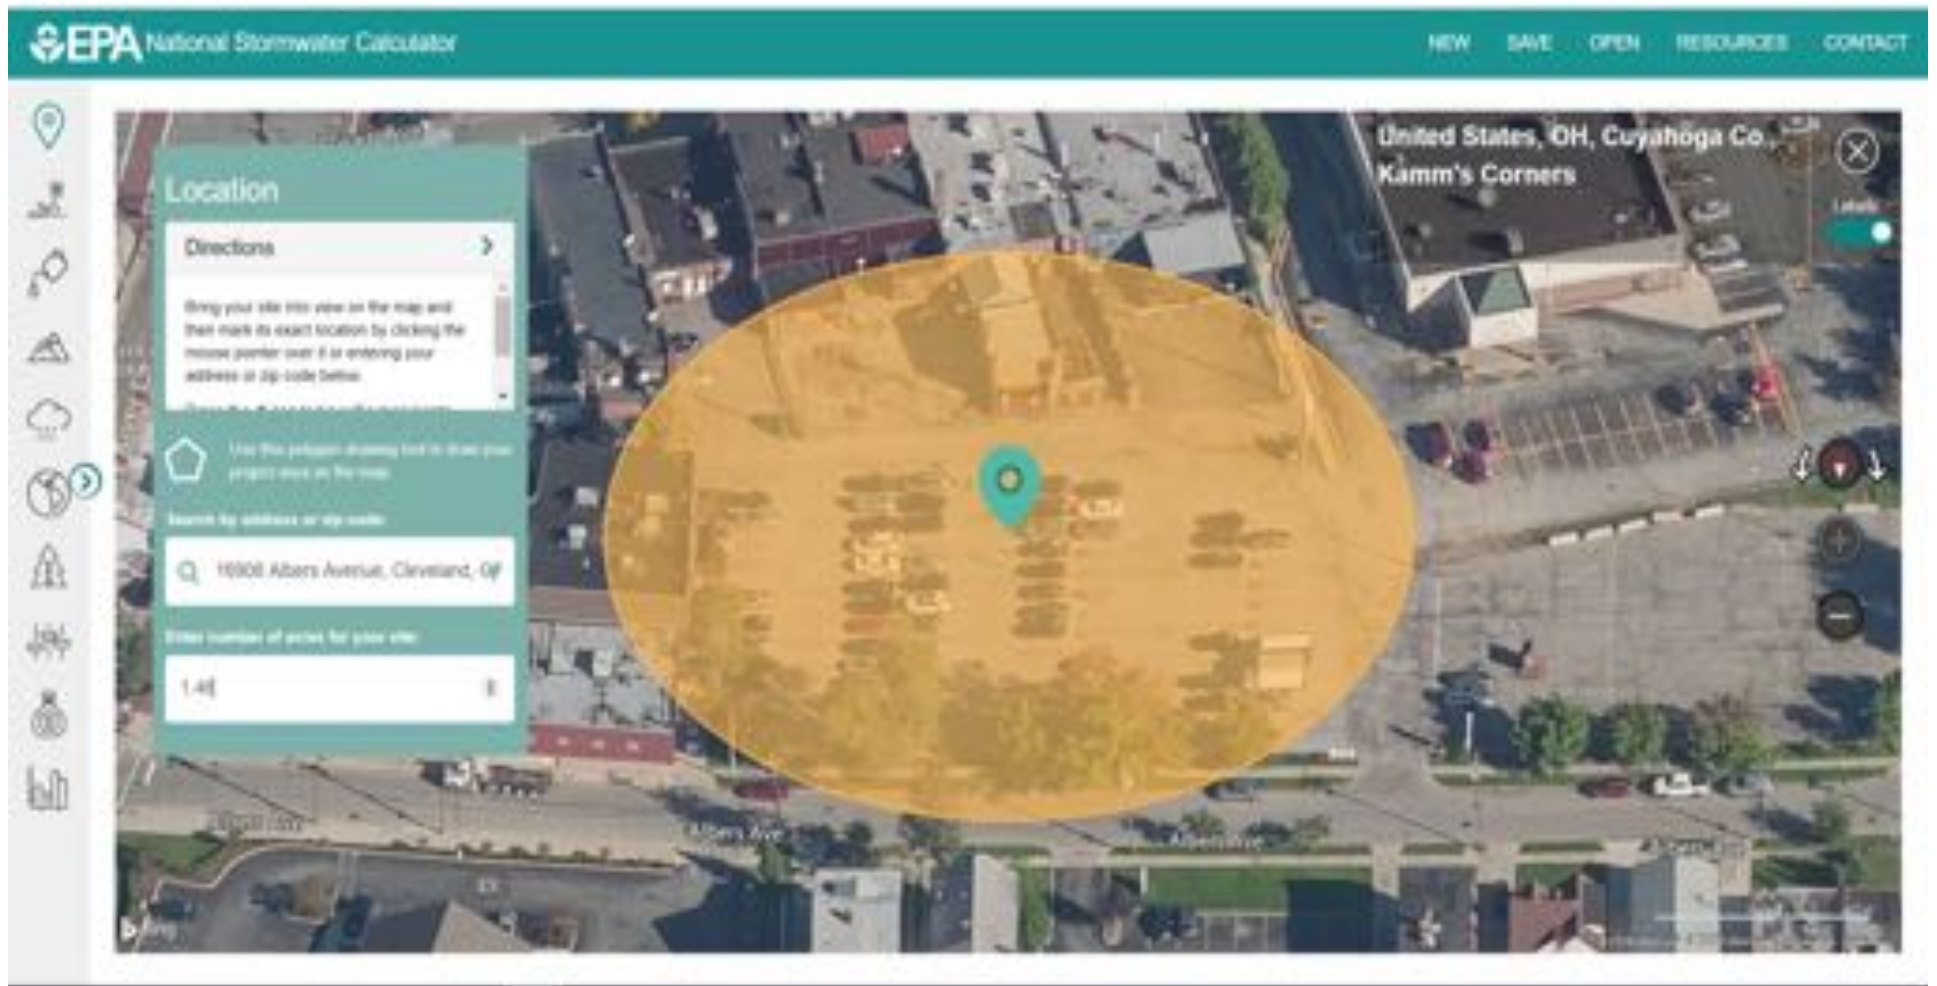

SWC Analysis: Soil Type: Rainfall Runoff Potential

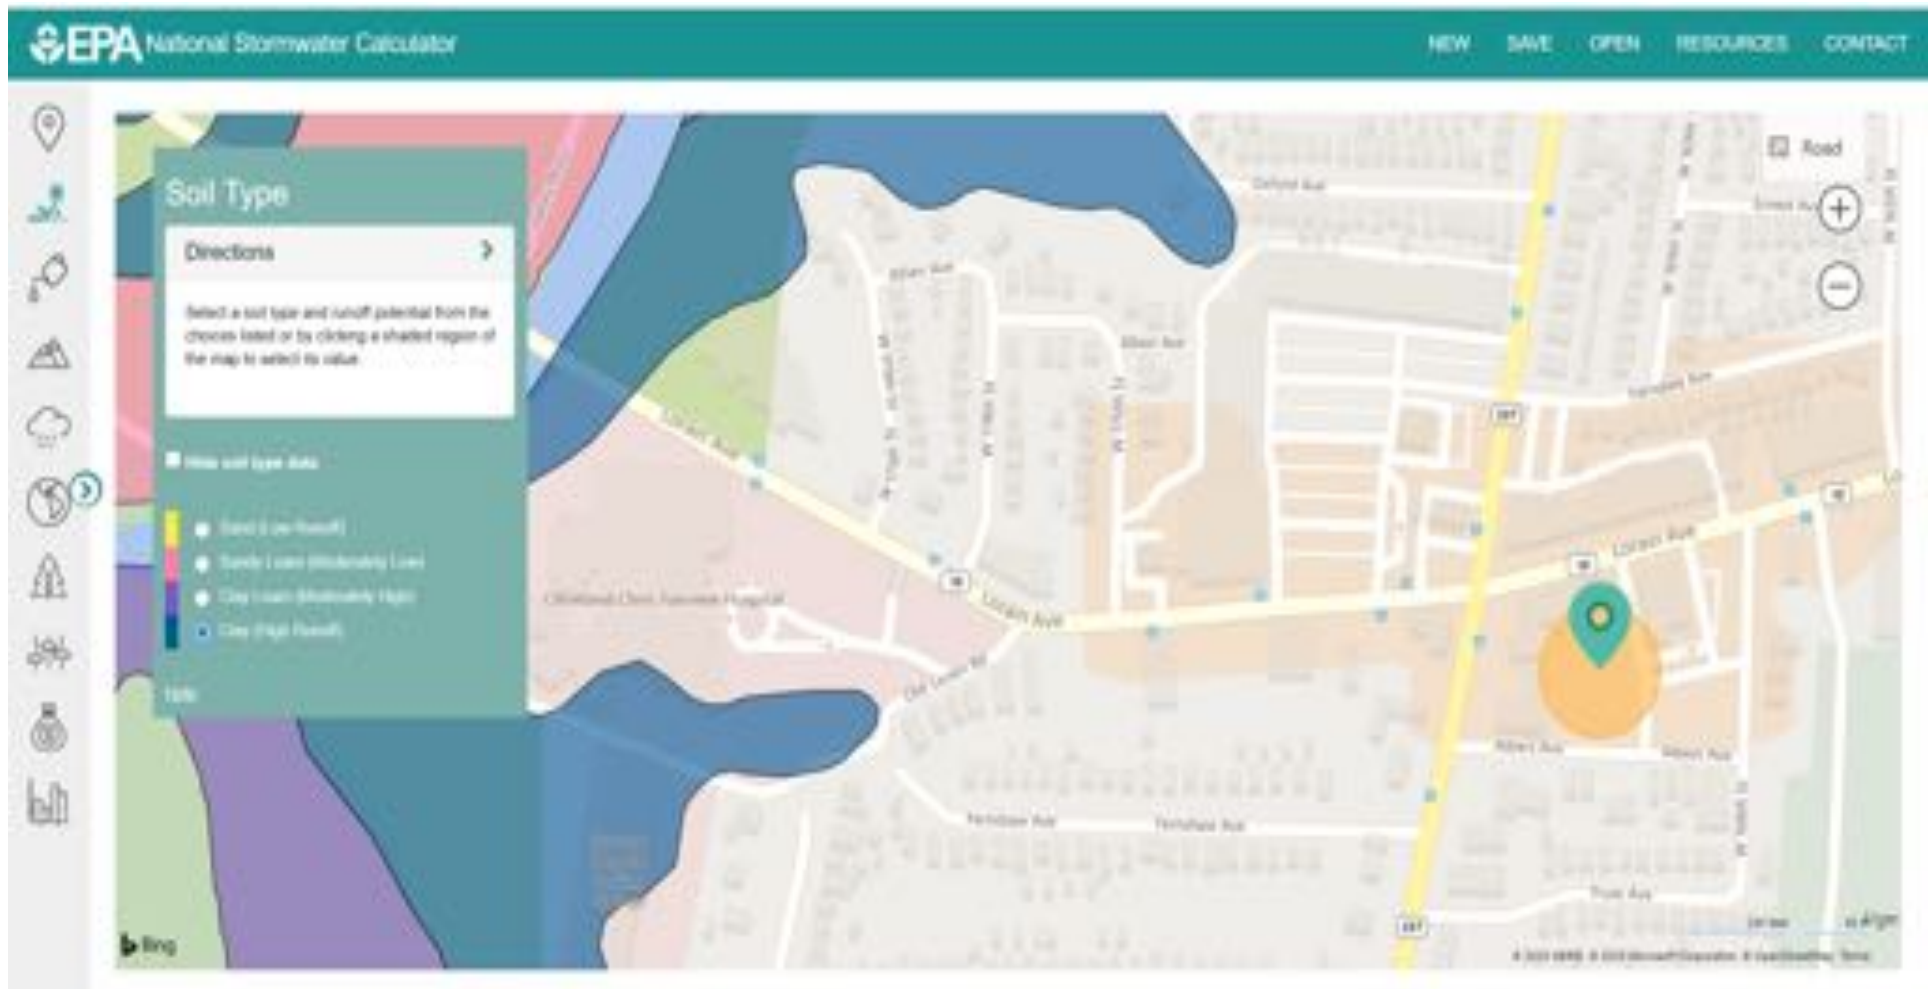

SWC Analysis: Soil Drainage (infiltration rate)

The screenshot displays the EPA National Stormwater Calculator interface. At the top, the EPA logo and the text "National Stormwater Calculator" are visible on the left, and navigation links "NEW", "SAVE", "OPEN", "RESOURCES", and "CONTACT" are on the right. The main area features a map with a color-coded overlay representing soil drainage infiltration rates. A legend on the left side of the map, titled "Soil Drainage", provides the following information:


- Directions:** Enter your own conductivity value directly into the input field below or click a shaded region on the map to select its conductivity value. If you leave the edit box blank, the default conductivity associated with the
- Show soil type data:** A checkbox that is currently checked.
- Infiltration Rate Legend:**
 - 0.01 in/hr (represented by a yellow color swatch)
 - 0.01 to 0.1 in/hr (represented by a light blue color swatch)
 - 0.1 to 1.0 in/hr (represented by a purple color swatch)
 - 1 in/hr (represented by a dark blue color swatch)
- Input Field:** A text box containing the value "0.110".
- Question:** "How fast does rainwater runoff from pervious areas of your site (infiltrate)?"

The map shows a residential area with streets like "W 11th St" and "W 12th St". A green location pin is placed on the map, and a yellow line highlights a path or boundary. The map also includes a "Road" legend, zoom controls, and a scale bar.

SWC Analysis: Topography

The screenshot displays the EPA National Stormwater Calculator interface. At the top, the EPA logo and the text "National Stormwater Calculator" are on the left, and navigation links "NEW", "SAVE", "OPEN", "RESOURCES", and "CONTACT" are on the right. The main area features a map with a topography overlay. A "Topography" panel is open on the left, containing a "Directions" section with a right-pointing arrow and the instruction: "Select a slope from the choices listed below or click a shaded region on the map to select its value." Below this, there is a checkbox labeled "Show land type data" which is currently unchecked. A legend lists four slope categories with corresponding colored circles: "Flat (0% Slope)" in light blue, "Moderately Flat (1% Slope)" in yellow, "Moderately Steep (10% Slope)" in orange, and "Steep (More Than 10% Slope)" in dark blue. The map shows a residential area with streets like "Alton Ave" and "Lorain Ave", and a large blue area representing a water body. A green location pin is placed on the map. The bottom left corner shows the "Bing" logo, and the bottom right corner has a scale bar and copyright information.

SWC Analysis: Historical Precipitation & Potential Evapotranspiration

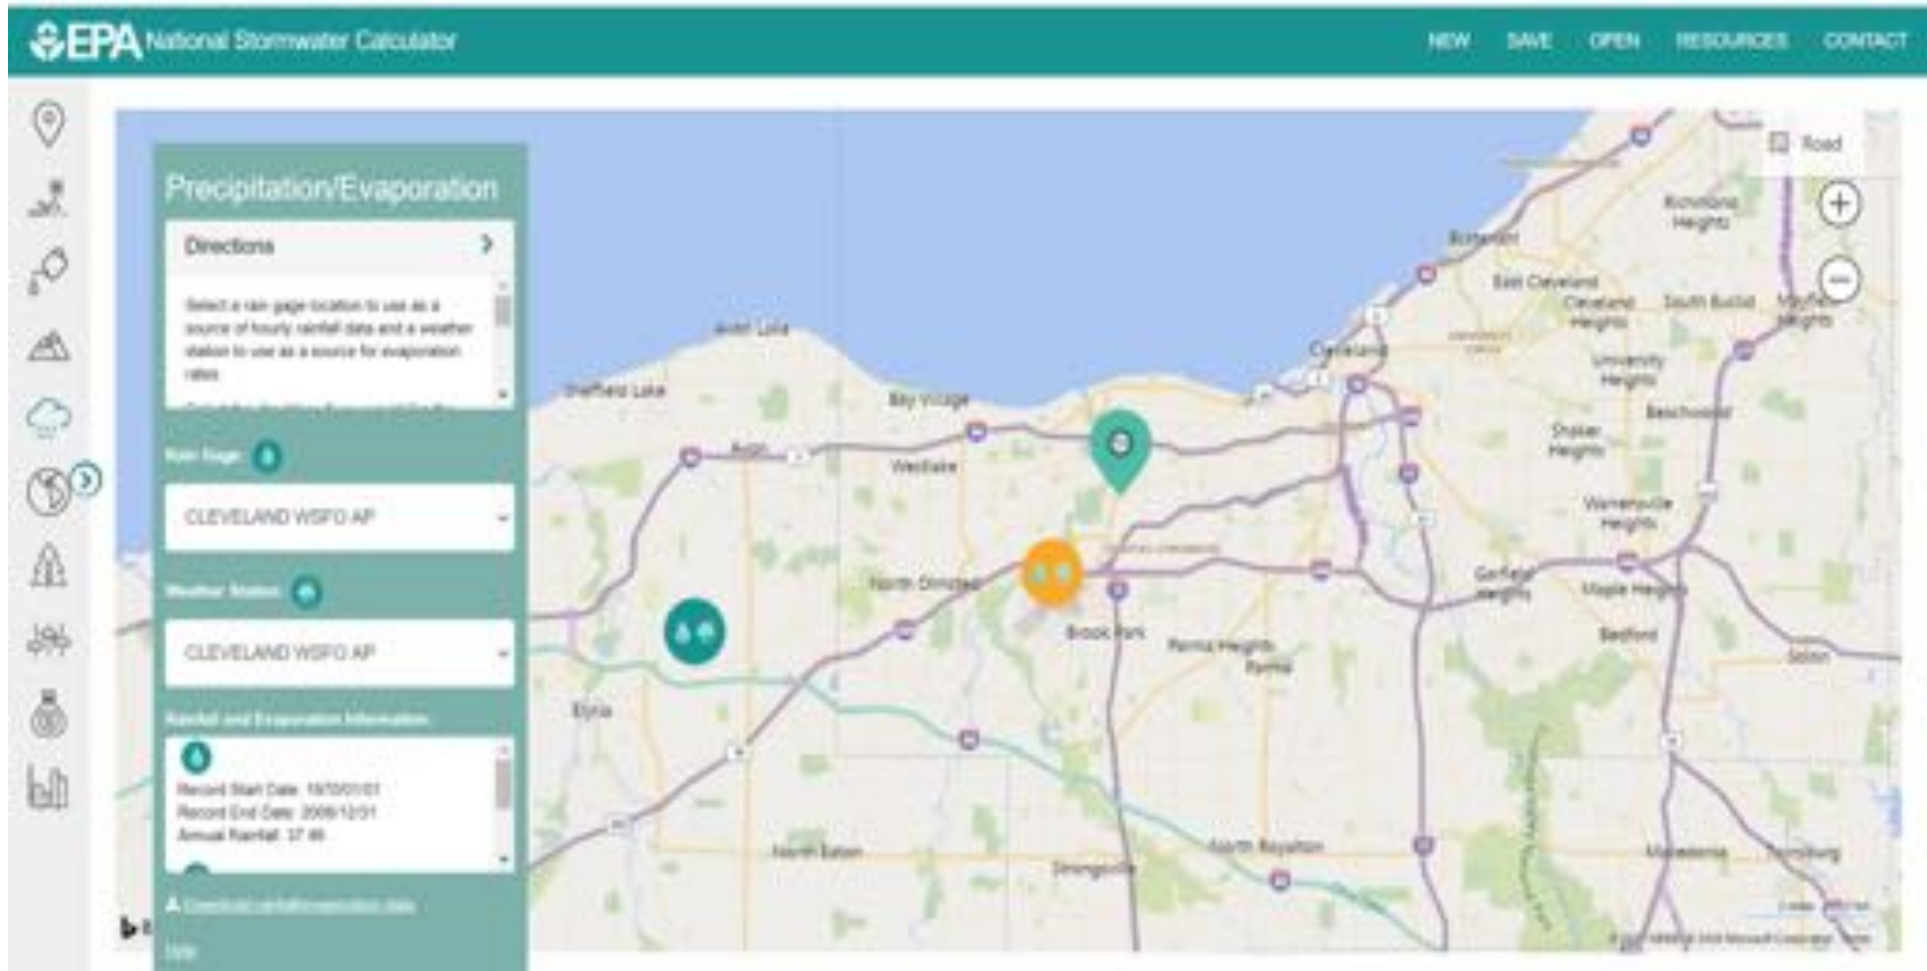

SWC Analysis: Existing Land Cover



SWC Analysis:



Extreme Weather Impacts: State of Ohio – 2019

NOAA State Climate Summaries:

<https://statesummaries.ncics.org/chapter/oh/>

KEY MESSAGE 2

Ohio has experienced a significant increase in heavy rain events. Increases in winter and spring precipitation are projected and will raise the risk of springtime flooding.

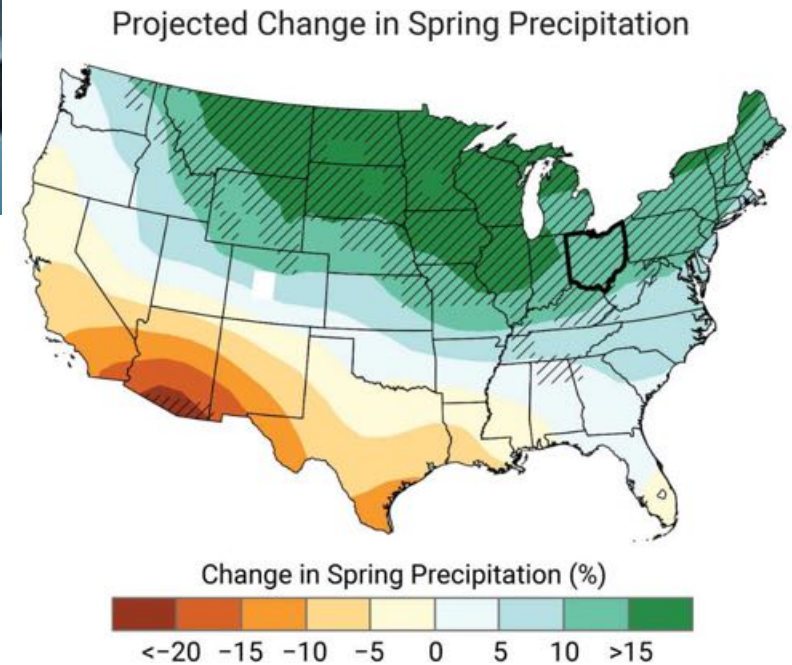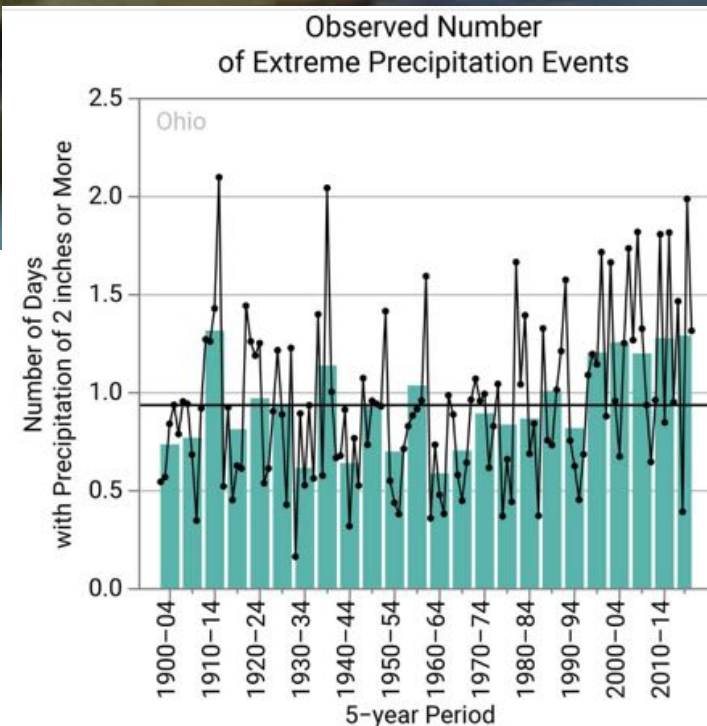

Extreme Weather Scenario Data: U.S. EPA's Climate Resilience Evaluation & Awareness Tool (CREAT) 2.0



- Climate scenarios derived from a range of outcomes of the World Climate Research Programme's CMIP3 multi-model dataset.
- Contains a database of climate change effects across the US localized to a grid of 0.5 degrees in latitude and longitude (about 30 by 30 miles).

<https://creat.epa.gov/creat/>

Extreme Weather Scenario Data Sources: U.S. EPA's Climate Resilience Evaluation & Awareness Tool (CREAT) 2.0

IPCC/WCRP CMIP3

Daily climate projections for 2020-2074 from 9 GCM models at a coarse (2-5°) scale.

BOR/LLNL




Downscaled projections of monthly averages to ½ degree grid cells.

EPA-CREAT

Select Warm/Wet, Median, & Hot/Dry outcomes for each cell.

SWC & SWMM-CAT

Mapping of monthly CREAT scenarios (including PET and extreme events) to 7,000 NWS stations.

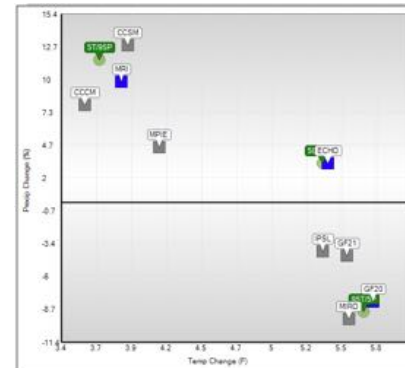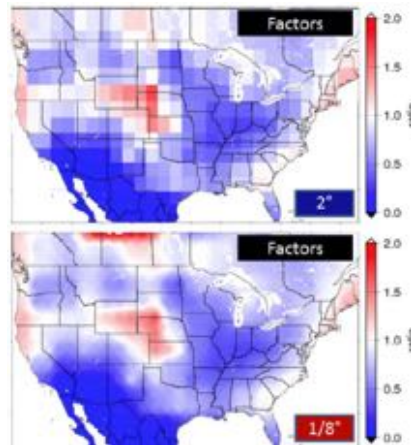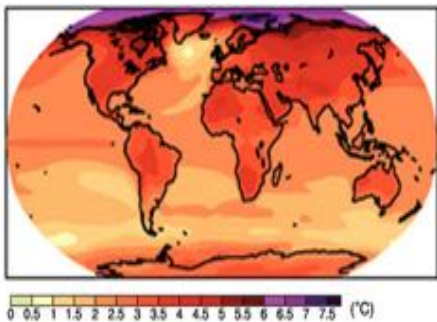


IPCC – International Program for Climate Change; WCRP – World Climate Research Program;

CMIP3 – 3rd Coupled Model Intercomparison Project;

BOR – Bureau of Reclamation; LLNL – Lawrence Livermore National Laboratory


SWMM Climate Adjustment Tool (CAT): Climate Change Scenarios & Extreme Storm Events

- Provides an add-in tool to SWMM and the SWC to identify seasonal changes in precipitation and temperature, as well as changes in extreme design events, at a localized level.
- Uses EPA-CREAT's localized seasonal adjustment factors derived from GCM runs that can be applied to historical meteorological records.
- Allows the user to apply their own climate adjustments if they so choose.

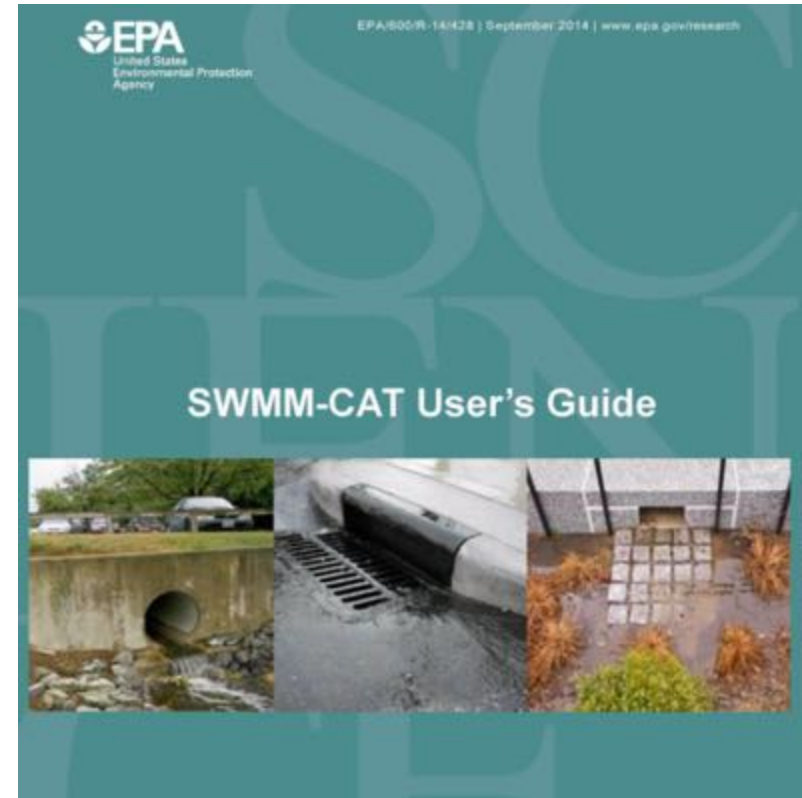

<https://www.epa.gov/water-research/storm-water-management-model-swmm>

SWC Analysis: Climate Change Scenarios & Extreme Storm Events

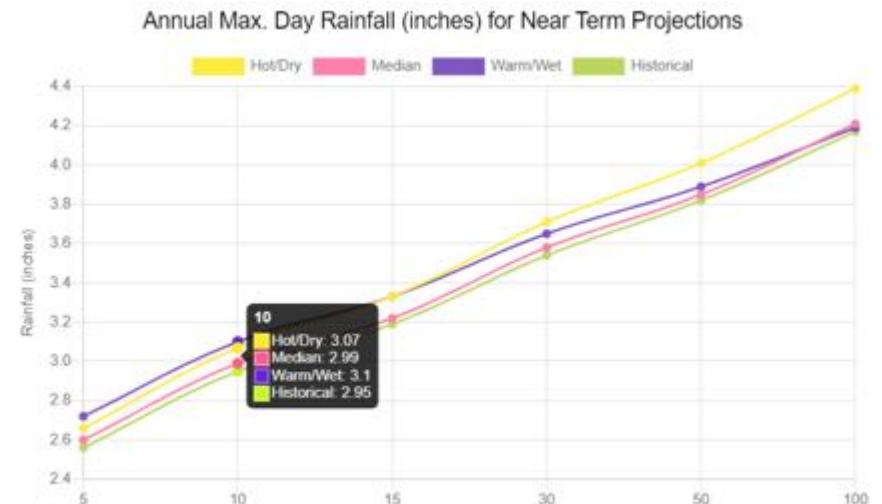

- CREAT 2.0 regional grid results encompass each of the SWC's rain gage and weather station locations.

SWC Analysis: Baseline Results

EPA National Stormwater Calculator

Summary Results
Current Scenario
Annual Rainfall: 38.63 in.

Legend: Runoff (dark teal), Infiltration (light green), Evaporation (orange)

Statistics

Statistics	Current Scenario
Average Annual Rainfall (inches)	38.63
Average Annual Runoff (inches)	25.64
Days per Year with Rainfall	81.25
Days per Year with Runoff	68.77
Percent of Total Days Retained	21.24
Smallest Rainfall w/ Runoff (inches)	0.10
Largest Rainfall w/ Runoff (inches)	0.20
Max Rainfall Retained (inches)	0.40

Results

Directions: [Dropdown]

Options:

Years to Analyze: 20

Event Threshold: 0.1

ignore consecutive days

Actions:

Reports:

- Site Description
- Summary Results**
- Rainfall / Runoff Events
- Rainfall / Runoff Occurrence Frequency
- Rainfall Retention Frequency
- Runoff Contribution by Rainfall Percentile
- Extreme Event Rainfall / Runoff
- Grid Summary

LID Controls:

Fact Sheet

Kamm's Corners Public Parking Lot Retrofit Project (NEORSRD)



Kamm's Corner Green Infrastructure Parking Lot Retrofit

Green Infrastructure 2018 Project Awarded

GI Technology: Bioretention
Drainage Area: 1.46 acres
GI Feature Area: 2,700 sq. ft.

Stormwater Capture: 690,457 gal/yr.
Total Project Cost: \$249,583
Grant Awarded: \$249,583

Opportunities & Benefits:

- Demonstration project at public parking lot
- Local Community Development Corporation programs parking lot for public events; farmers market, etc.

Challenges & Constraints:

- Delays caused by site control & project coordination
- Incorporating maintenance requirements into City standard maintenance protocols

Before


SWC Analysis: LID: Redevelopment Project

The screenshot displays the EPA National Stormwater Calculator interface. The top navigation bar includes the EPA logo, the text "National Stormwater Calculator", and links for "NEW", "SAVE", "OPEN", "RESOURCES", and "CONTACT".

The main interface is divided into several sections:

- LID Controls Panel (Left):** A vertical sidebar with a "Directions" dropdown menu and sliders for various LID controls: Stormwater, Rain Harvesting, Rain Gardens, Green Roofs, Street Planters, Infiltration Basins, Detachable Pavement, and Design Storm for Testing. A "Link" button is at the bottom.
- Map (Center):** An aerial view of a residential area with a large yellow circular overlay indicating a selected area. Street names "Larkin Ave" and "Akers Ave" are visible, along with the address "237".
- Rain Gardens Panel (Right):** A detailed configuration window for Rain Gardens. It includes:
 - Image:** A photograph of a rain garden next to a house and a cross-sectional diagram showing the soil layers and water infiltration.
 - Description:** "Rain Gardens are shallow depressions filled with an engineered soil mix that supports vegetative growth. They are usually used on individual home lots to capture roof runoff. Typical soil depths range from 6 to 18 inches. The Capture Ratio is the ratio of the rain garden's area to the impervious area that drains onto it." A "Learn More" link is provided.
 - Parameters:** Sliders and input fields for:
 - Ponding Height: 6 in.
 - Soil Media Thickness: 12 in.
 - Soil Media Conductivity: 10 in./hr.
 - % Capture Ratio: 5 %.
 - Pre-Treatment:** A checked checkbox.
 - Buttons:** "Save for Design Storm", "Save and Return", and "Restore Defaults".

SWC Analysis: Runoff Reduction Results

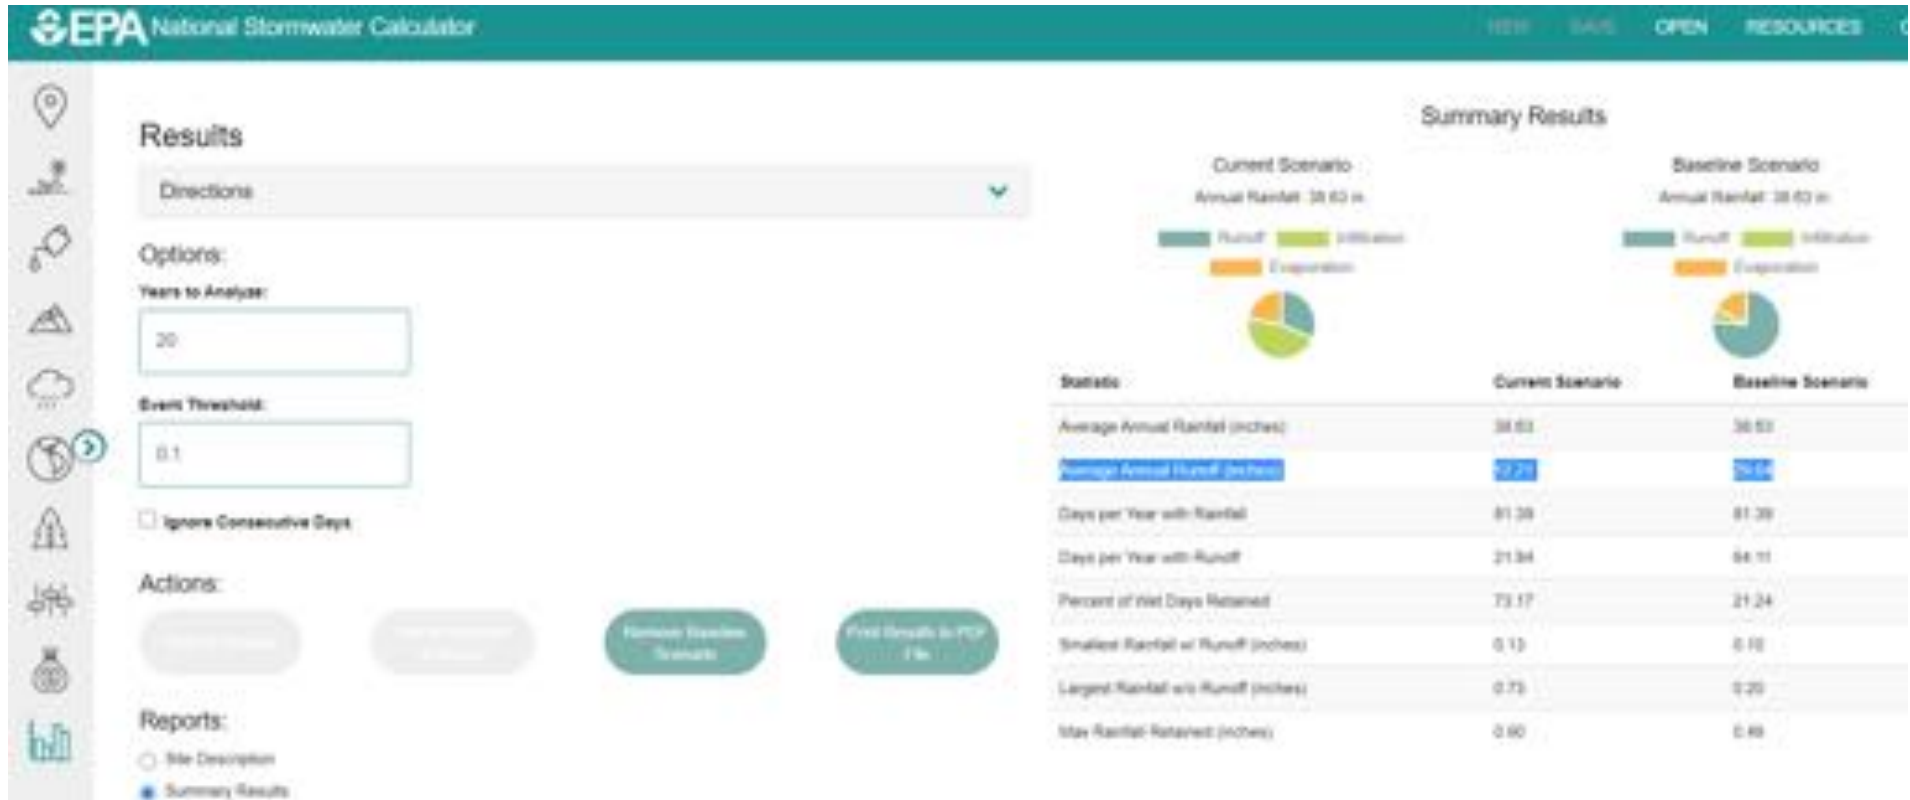

Estimated runoff reduction of 17.43 inches/year ~ 690,457 gal./year

SWC Analysis:

Runoff Results: Extreme Storm Events

EPA National Stormwater Calculator

Results

Directions

Options:

Years to Analyze: 20

Event Threshold: 0.1

Ignore Consecutive Days

Actions:

Reports:

- Site Description
- Summary Results
- Rainfall / Runoff Events
- Rainfall / Runoff Exceedance Frequency
- Rainfall Exceedance Frequency
- Runoff Contribution by Rainfall Percentile
- Extreme Event Rainfall / Runoff
- Cost Summary

Extreme Event Rainfall / Runoff
Extreme Event Rainfall / Runoff Depth

Storm Period Percent	Rainfall (in)	Runoff (in)	Rainfall Baseline (in)	Runoff Baseline (in)
0	3.22	1.64	3.22	3.22
10	3.22	1.64	3.22	3.22
20	3.22	1.64	3.22	3.22
30	3.22	1.64	3.22	3.22
40	3.22	1.64	3.22	3.22
50	3.22	1.64	3.22	3.22
60	3.22	1.64	3.22	3.22
70	3.22	1.64	3.22	3.22
80	3.22	1.64	3.22	3.22
90	3.22	1.64	3.22	3.22
100	3.22	1.64	3.22	3.22

Extreme Event Peak Rainfall / Runoff
Extreme Event Peak Rainfall / Runoff Intensity

Storm Period Percent	Rainfall (in/hr)	Runoff (in/hr)	Rainfall Baseline (in/hr)	Runoff Baseline (in/hr)
5	2.5	3.5	3.5	3.5
10	3.0	4.0	4.0	4.0
15	3.5	4.5	4.5	4.5
30	3.5	4.5	4.5	4.5
50	3.5	4.5	4.5	4.5
100	3.5	4.5	4.5	4.5

Discussion and Questions

Thank You!

National Stormwater Calculator Website:

<https://www.epa.gov/water-research/national-stormwater-calculator>

Contact: SWC@epa.gov

Jason Bernagros

U.S. Environmental Protection Agency

Office of Research and Development

Center for Environmental Solutions and Emergency Response

Water Infrastructure Division

Stormwater Management Branch

P: (202) 566-1671

E: bernagros.jason@epa.gov